

GMS 300 SHR



*Rotary drilling
Reverse circulation
Core drilling
Dry rotary drilling
Grab drilling
Drilling by
down-the-hole-
hammer*



Günhan-ark



*İmalat - Sondaj - Döküm Taahhüt San. ve Tic. Ltd. Şti
Machinery - Drilling and Casting Industry Co.*



DS/EN ISO 9002
Cert. No. DK-FDC-9002-005



DANAK
Reg. Nr. 5008

Chassis*/Truck

IVECO - MAGIRUS
 Mercedes-Benz
 Installed power: approx. 130 HP

Mast*

crown load: max. 9 t, alt. 14 t
 hook load: 6 t, alt. 10 t
 free height of lifting: 9 m

Pull-down device

with hydr. cylinder
 pull-down force: max. 30 kN (3 Mp)
 retraction force: max. 60 kN (6 Mp)
 length of stroke: 5 or 7 m

Power swivel*

switchable	1. speed	2. speed
max. torque:	160 kpm	545 kpm
rot. speed:	0-31/rpm	0-90/rpm
free passage:	130 mm	
carrying capacity :	max. 20 t	

Hydr. winch

line pull: max. 3200 kp
 rope speed: max. 2 m/sec
 capacity of rope drum: 150 m-Ø13 mm

Auxilliary hydr. winch*

line pull: max. 350 kp
 rope speed: max. 1,7 m/sec
 capacity of rope drum: 250 m-Ø6 mm

Slushing units

Piston mud pump*


type Duplex 4 " x 5"
 delivery: 0-450 l/min (0-119 GPM)
 service pressure: max. 20 bar (285 psi)

Foam injection pump

delivery: 75 l/min (20 GPM)
 service pressure: max. 20 bar (285 psi)

Transport dimensions

width: 2.5 m
 height: 3.5 m
 length: 7.5 m
 weight: approx. 10 t

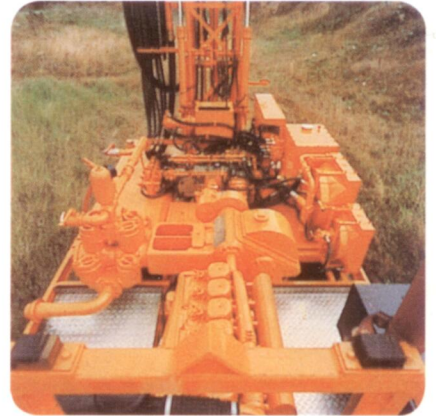

Günhan-ark
 İmalat-Sondaj-Döküm Taahhüt San. ve Tic.Ltd.Şti
 Machinery - Drilling and Casting Industry Co.

Turgut Reis Caddesi Çatal Sokak No:24/15
 Maltepe / ANKARA - TÜRKİYE
 Tel : (0.312) 231 67 32 - 230 52 73 230 52 74
 Fax : (0.312) 230 52 73
 E-mail: g-ark@superonline.com

Fabrika/Factory
 Kızılay Mah. Kazım Karabekir Caddesi No: 95/97
 ELAZIĞ - TÜRKİYE
 Tel : (0.424) 224 58 96 - 224 18 96
 Fax : (0.424) 224 15 13



DS/EN ISO 9002
 Cert. No. DK-FDC-9002-005

